


1.3Megapixel IP Camera

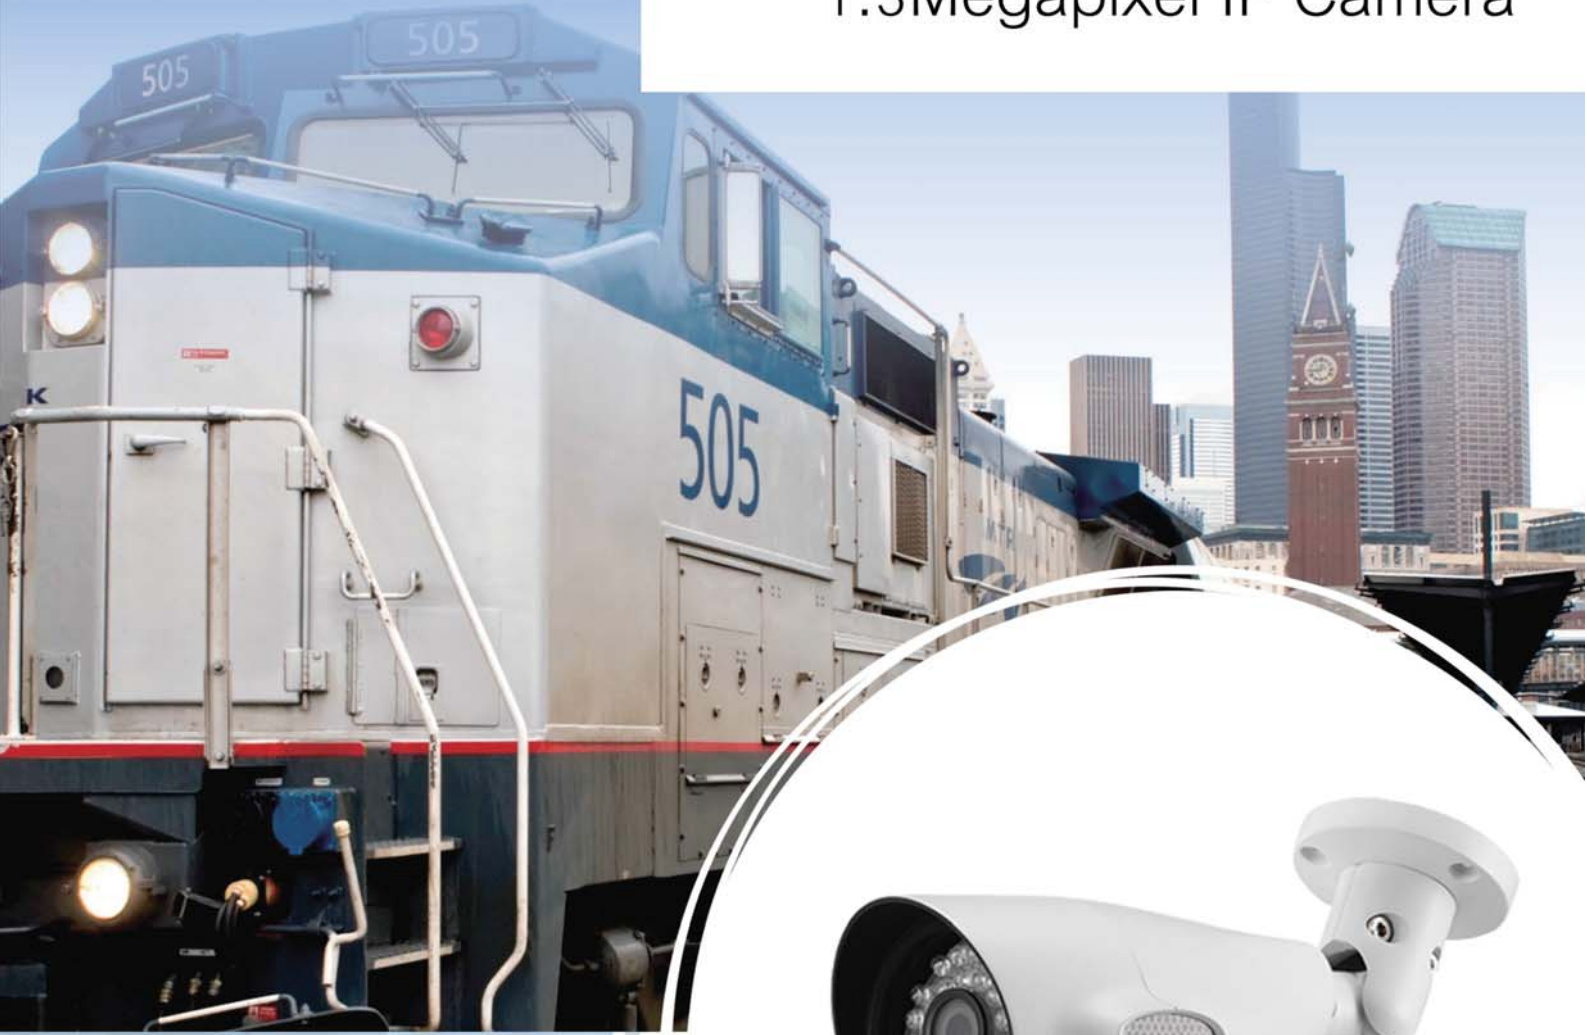

IP CAMERA

KW-IP 108

MAIN FEATURES

- ☐ 1/3" 1.3Megapixel Aptina CMOS
- ☐ Resolution 1280 (H)x720 (V)
- ☐ Lens 3.6
- ☐ IR LED Distance 25M.
- ☐ Onvif 2.0 Support
- ☐ BLC, Auto White Balance, Noise Reduction
- ☐ IP 66

IP Camera

Order information

KW-IP 108



Camera	KW-IP 108
Image Sensor	1/3" 1.3Megapixel Aptina CMOS
Effective Pixels	1280(H)x720(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/50~1/10000
Min. Illumination	Color: 0. 1 lux /F1.4, B/W: 0.01 lux /F1.4,0 lux (IR on)
S/N Ratio	>50dB
Max. IR LEDs Length	25m
Day/Night	Auto(ICR) / Color / B/W
Backlight	BLC
White Balance	Auto
Gain Control	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 areas
Slow Shutter	None / Low / Middle / High
Motion Detection	22X18 areas
Focal Length	3.6mm (Option : 6/8mm)
Max Aperture	F1.2
Mount Type	Board-in Type
Compression	H.264 High Profile / JPEG Snapshot
Resolution	60Hz Mode: 960P(1280×960) / 720P(1280×720) / D1(704X480) / CIF(352X240)
Main Stream	960P/720P/D1(1 ~ 25/30fps)
Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 64K ~ 4096Kbps
Ethernet	RJ-45 (10/100Base-T)
Protocol	IPv4, HTTP, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Cloud
ONVIF	ONVIF Ver. 2.0; PORT:8899
Max. User Access	5 users
Power Supply	DC12V, PoE (802.3af)
Power Consumption	<6W
Working Environment	Temperature: -10°C~+60°C, Humidity: 10%~90%
Dimensions	175 x 85mm
Weight	500g
Weatherproofing	IP 66