



Standalone Face Scan and Fingerprint Access Control System

เครื่องบันทึกเวลาการทำงานด้วยใบหน้า พร้อมระบบเปิด-ปิด ประตู

รองรับ ใบหน้า ลายนิ้วมือ การ์ด

FACE SCAN

FINGERPRINT

CARD

- > Trackable
- > Contactless
- > Accurate
- > Standalone
- > User Friendly
- > Reliable performance
- > Multi-factor Authentication

MODEL :

CMi F65S

1,500 Face 700 Face


- 2.8" TFT Graphic Interface
- 200,000 Record
- Face/Fingerprint/Password/Card/Face+Password/Fingerprint+Password/Face+Card/Fingerprint+Card
- TCP/IP,USB,U disk download,Wiegand in/out
- ID Card
- Access control (ต่อผ่านpower)
- Battery back up (working 2 hours)

Installation Diagram Standalone


การทำงานเปิด - ปิดประตู

MODEL :


CMi F65S

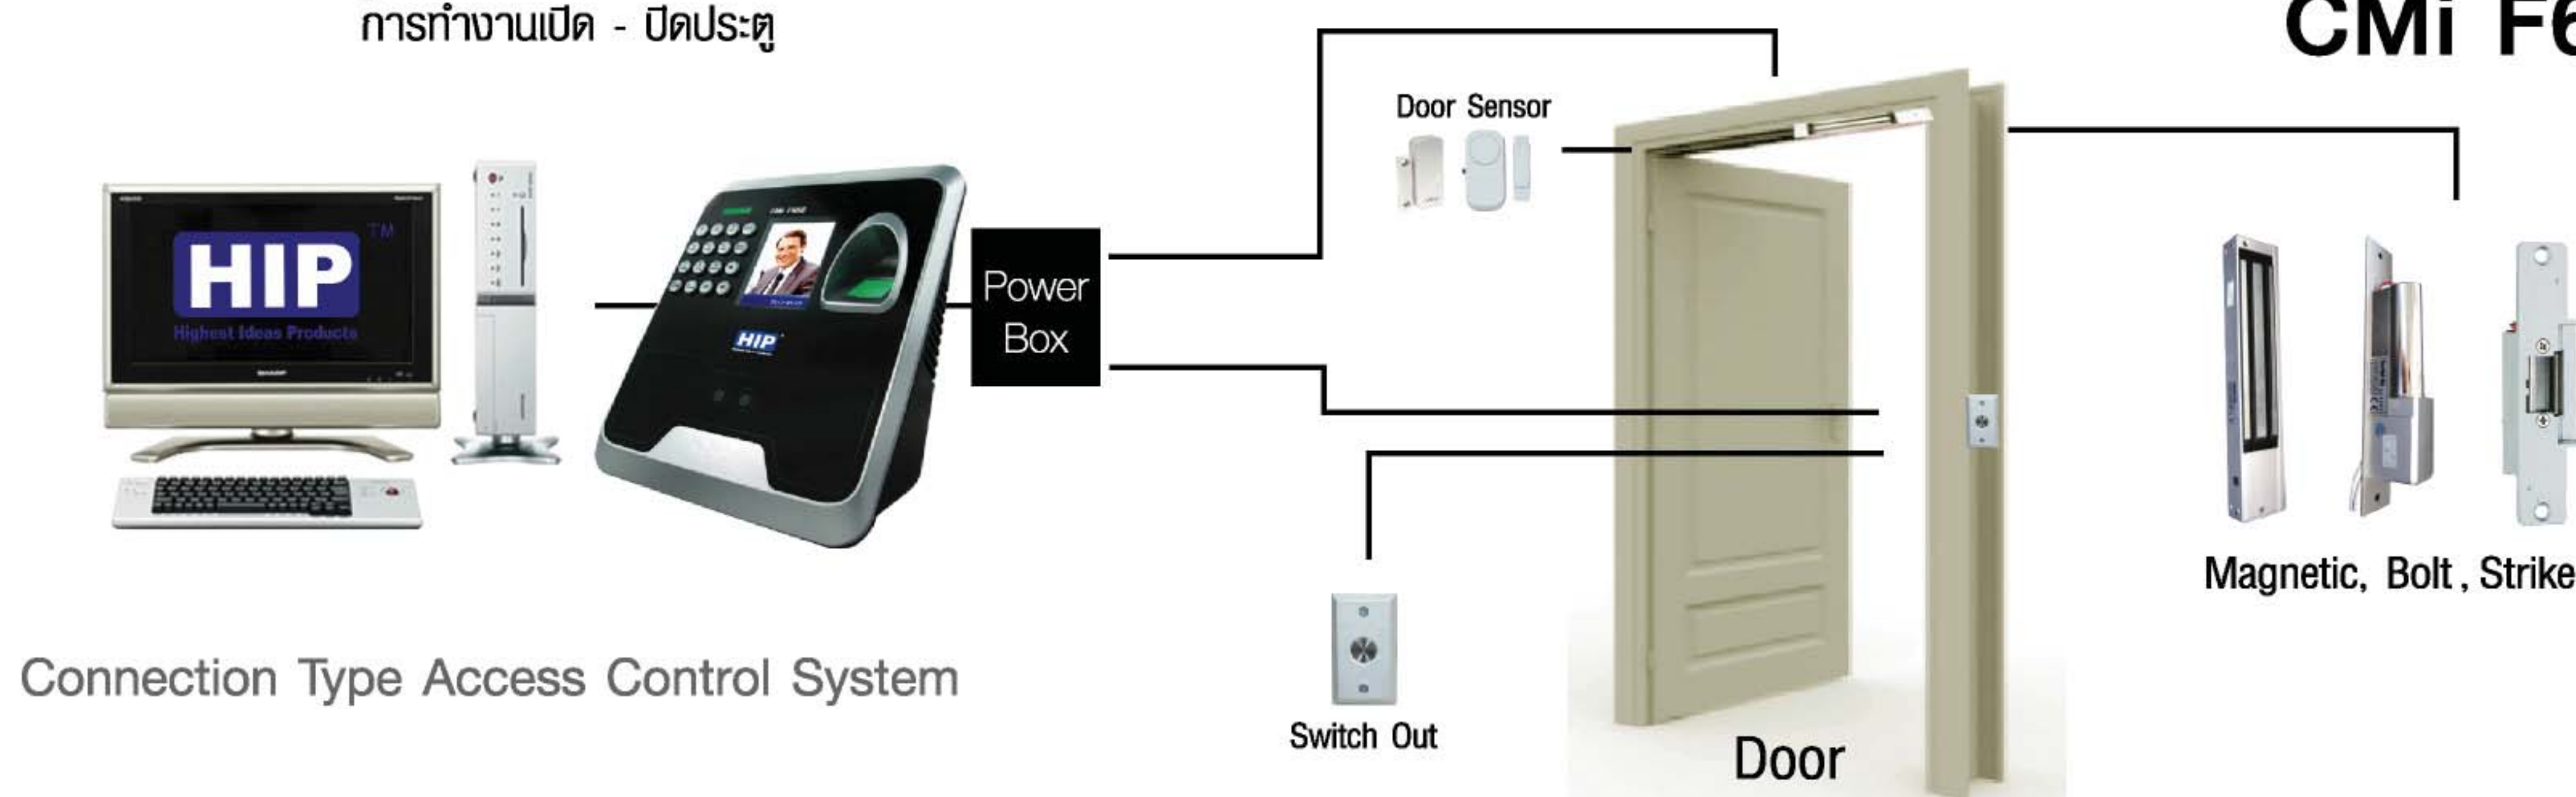

Connection Type Network Protocol TCP/IP

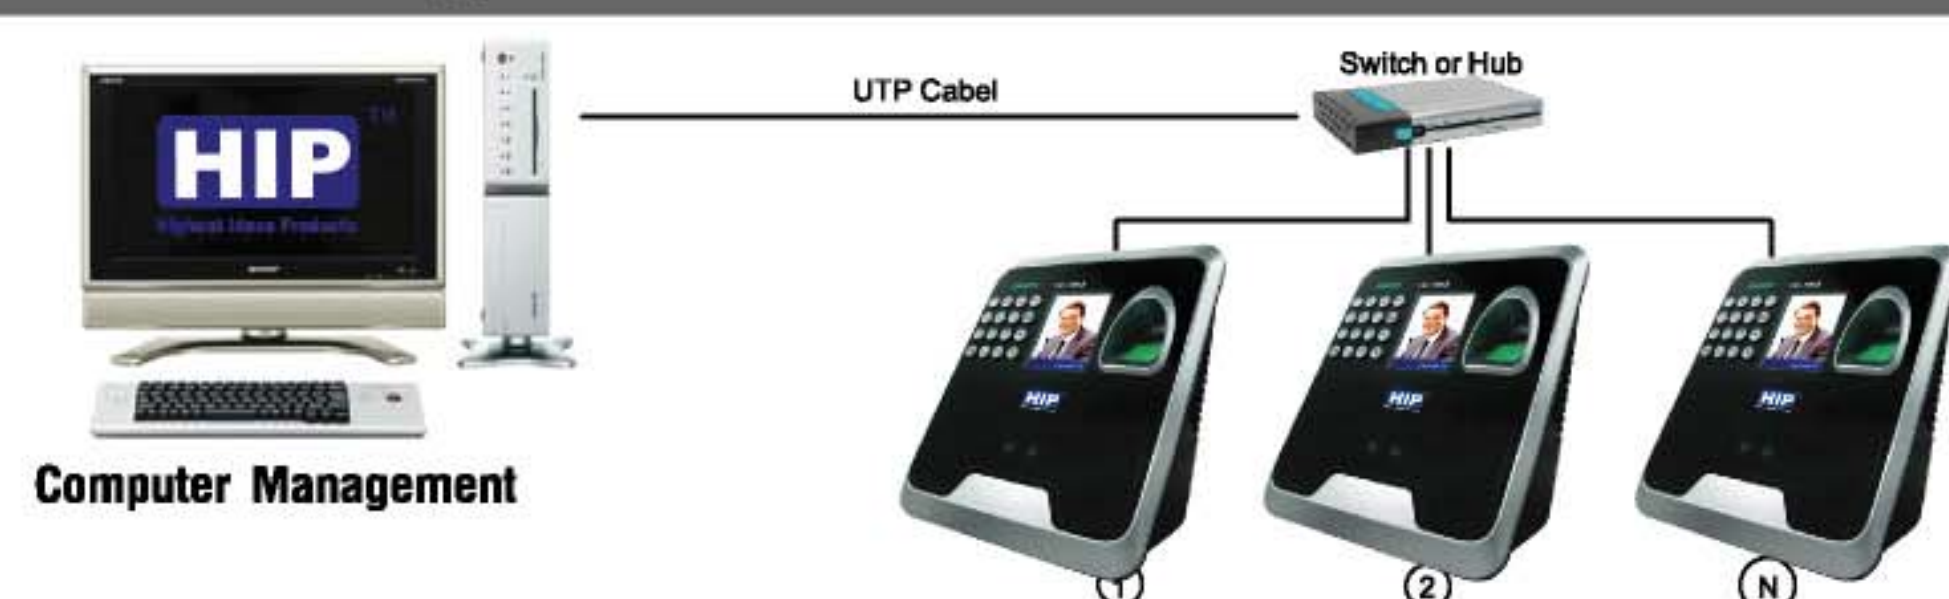

Connection Type U disk download

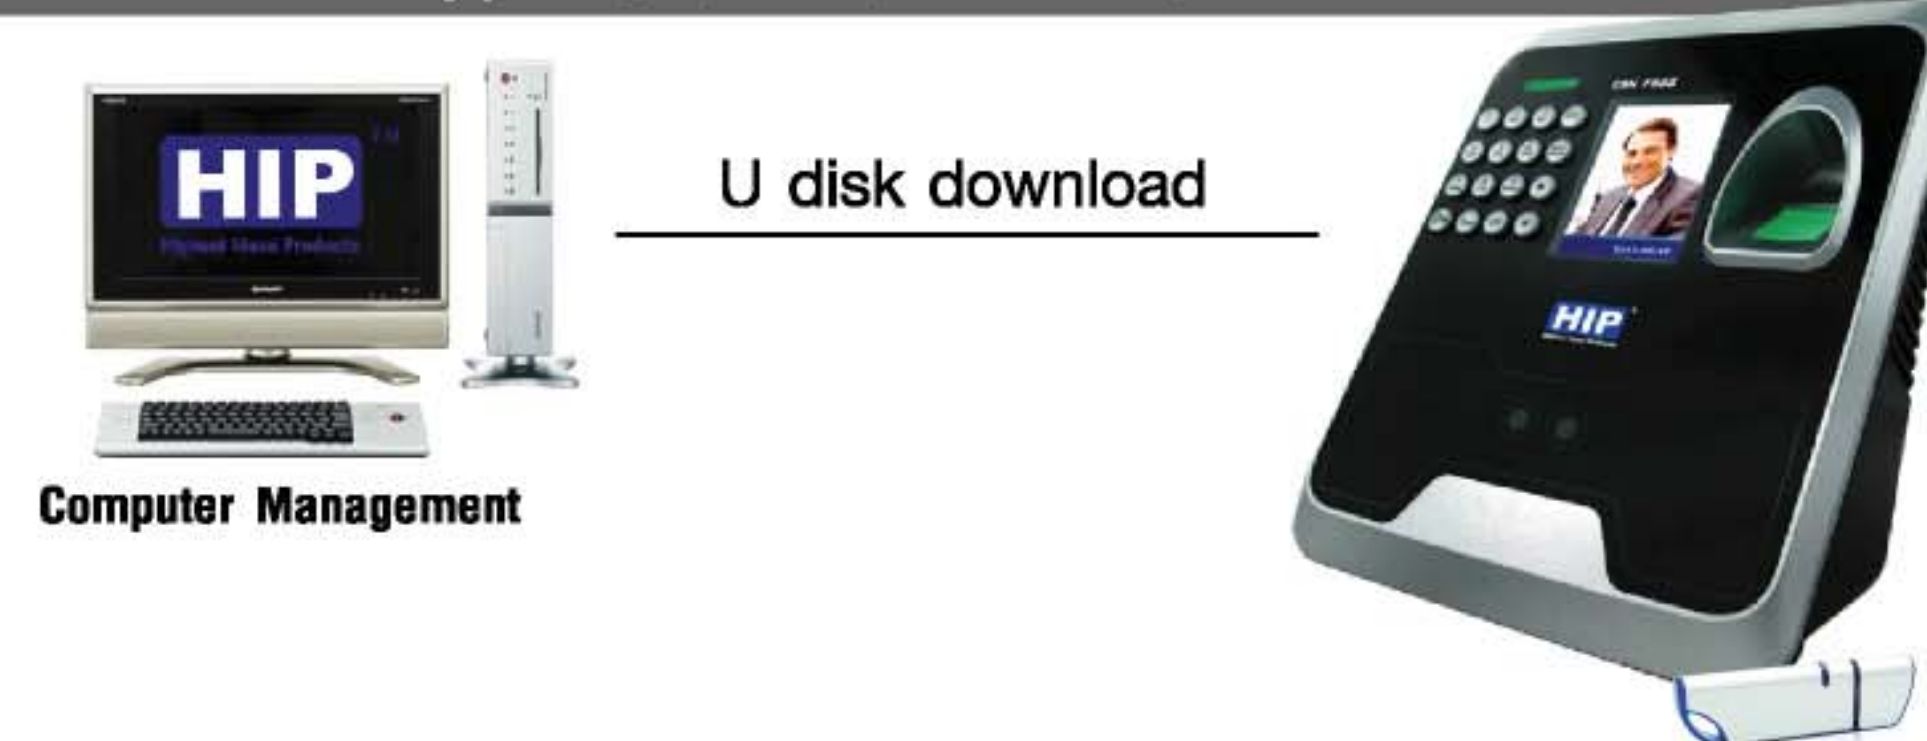

Technical Specification

Model	CMi F65S 1,500 Face	CMi F65S 700 Face
Screen	2.8" TFT Graphic Interface	2.8" TFT Graphic Interface
Resolution	320*240	320*240
Capacity	1,500 Face (10,000 Finger & 1,500 ID card)	700 Face (7,000 Finger & 700 ID card)
Record Capacity	200,000 Record	200,000 Record
Identification Time	<=0.5s"	<=0.5s"
Identification Mode	Face/Fingerprint/Password/Card/ Face+Password/Fingerprint+Password/ Face+Card/Fingerprint+Card	Face/Fingerprint/Password/Card/ Face+Password/Fingerprint+Password/ Face+Card/Fingerprint+Card
Authentication Mode	"1:N"	"1:N"
Communication Protocols	TCP/IP,USB,U disk download, Wiegand in/out	TCP/IP,USB,U disk download, Wiegand in/out
Smart Card	ID Card	ID Card
Other Function	Access control (ต่อพ่วงpower) Battery back up (working 2 hours) Schedule Bell (ที่ตัวเครื่อง)	Access control (ต่อพ่วงpower) Battery back up (working 2 hours) Schedule Bell (ที่ตัวเครื่อง)
Operating Environment	Operating Temp:-10 °C ~ +60 °C Humidity(RH):20%~80%	Operating Temp:-10 °C ~ +60 °C Humidity(RH):20%~80%
Power	DC5V2A	DC5V2A
Language	English,Thai	English,Thai
Size	180(L)*145(W)*70(H) MM	180(L)*145(W)*70(H) MM
Optional Features	WIFI; Mifare Card(Option)	WIFI; Mifare Card(Option)