


Kowa

DOME

Model : KW-280

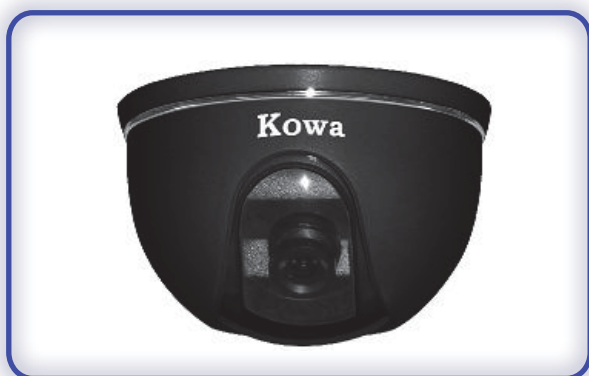

Features

- Horizontal Resolution 420 TV Line
- Electronic Shutter up to 1/100,000 sec
- Easy for installation
- Forcal Length 3.6mm
- Scanning System 2:1 interlace

Specification

MODEL NO.		KW-280
Signal System		NTSC or PAL
Image Device		SHARP 1/4"Color CCD
Horizontal Resolution		420 TV Lines
Picture Elements		NTSC:512x492,PAL:512x582
Electronic Shutter Speed		1/60 ~ 1/100,000 sec
S/N Ratio		More than 48dB (AGC Off)
Sensitivity		0.4 LUX
Sync. System		Internal
Video Output Level		1.0 Vp-p, 75 Ohm
AGC		On (Default)
White Balance/Color Temp Range		Auto / 2100°K ~ 8200°K
BLC		On (Default)
Connector	Video out	BNC Type
	Power	DC JACK ϕ 2.1
	Forcal Length	3.6MM
LENS	F Number	2
	Field of View	70°
Power Requirement ($\pm 10\%$)		DC12V
Power Consumption ($\pm 10\%$)		DC12V / 500mA
Camera Housing/ Sunshade Material		ABS plastic
Camera Mounting Stand Material		ABS plastic
Operation Temp.		Operating: -10°C ~ 50°C, Storage: -30°C ~ +60°C, Humidity: 10~95%RH
Dimensions (mm)		96(ϕ) x 63(H) mm
Weight (N.W)		Approx. 160g
Electronic Shutter		NTSC:1/60~1/100,000,PAL:1/50~1/100,000
Current Consumption		35mA max