


1.3Megapixel IP Camera

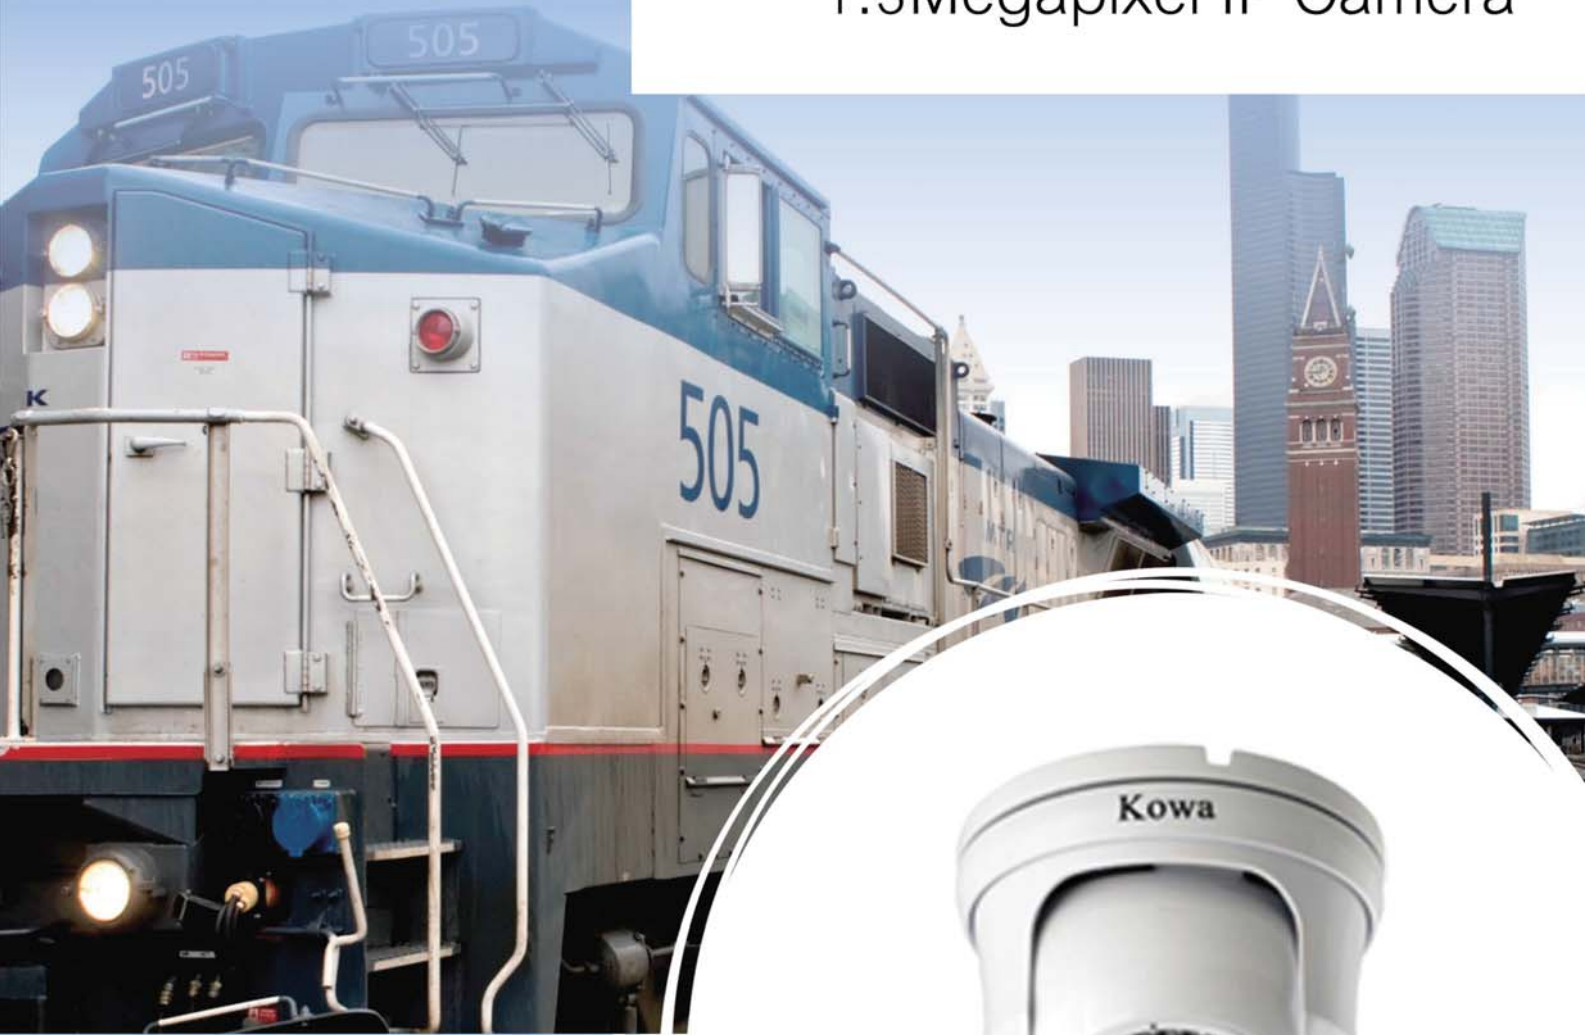

IP CAMERA

KW-IP 201

MAIN FEATURES

- 1/3" Progressive Scan CMOS
- Hi3518E, Megapixel CMOS Sensor
- Upto 1.3MP resolution, real-time image
- 2.8-12mm MegaPixel Varifocal lens
- 36pcs Tyntekl RLED, 20M IR Distance
- IR-CUT filter switch to achieve day and night
- Compatible with ONVIF standard
- Vandalproof Varifocal IR Dome Camera

IP Camera

Order information

KW-IP 201



Camera	KW-IP 201
Image Sensor	1/3" Progressive Scan CMOS
Signal System	PAL/NTSC
Effective Resolution	1280x960
Minimum Illumination	Color:0.01Lux@(F1.2,AGC ON),0 LUX with IR
Electronic Shutter	1/50(1/60)s-1/100,000s
Lens	2.8-12mm MegaPixel Manual Varifocal lens
Day/Night	Support IR-CUT
IR Distance	36pcs Tyntek IR LED,20M IR Distance
Synchronization way	Internal Synchronization
Video Output	1Vp-p Composite Output(75Ω/BNC)
S/N Ratio	>48dB
Video Compression	H.264 Main Profile, JPEG Capture
Video Bite Rate	32 Kbps~8Mbps
Max. Resolution	1280*960
Frame Rate	50Hz:25fps(1920*960)
	60Hz:30fps(1920*960)
Storage	Support network storage
Intelligent Alarm	Motion detect, Video loss, Network storage address conflict
Protocols	TCP/IP,HTTP,DHCP,DNS,DDNS, PPPoE, SMTP, NTP (HTTPS,SIP ,802.1x,IPv6 Optional)
Basic	Anti-flicker, Dual stream, Heartbeat, Password protection
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet interface
Video Output	1Vp-p Composite Output(75Ω/BNC)
Operating Condition	-10°C~60°C, Humidity 90% or less(non-condensing)
Power Supply	DC12V ±10%