



บริษัท แอดวานซ์ บิซิเนส เทคโนโลยี จำกัด
 ADVANCE BUSINESS TECHNOLOGY CO.,LTD.
 106 ซ.พระรามที่2 ซอย42 น.พระราม2 แขวงบางมด เขตตลิ่งชัน กรุงเทพฯ 10150
 106 Soi Rama II 42, Rama II Rd., Bangmod Jomthong Bangkok 10150

TEL: 02-898-6470-1
 FAX: 02-898-6470#13
 WWW.ABT-THAI.COM

ผู้นำด้านระบบรักษาความปลอดภัย
 SECURITY TECHNOLOGY SOLUTION

- SECURITY TECHNOLOGY
- BIOMETRIC TECHNOLOGY
- RFID TECHNOLOGY
- CCTV TECHNOLOGY



เครื่องสแกนหน้าบันทึกการทำงานพร้อมระบบ Wi-Fi เชื่อมต่อง่ายยิ่งขึ้น

More Capacity and Wireless Connection

S504W VF680 VF780

FACE SCAN



- รองรับระบบ Wi-Fi
- หน้าจอ 3-inch TFT touch screen
- รองรับ 400 ใบหน้า
- รองรับการ์ดได้ 10,000 ใบ
- จัดจำข้อมูลสูงสุด 100,000 ข้อมูล


S 504W is a face identification T&A terminal with face, PIN and RFID recognition modes. With the latest face identification algorithm and streamlined technology, it can hold 400 face templates without dividing into groups and complete verification in less than 1 second. Communicating via Wi-Fi, Ethernet, and USB (host and client), it can ensure a smooth connection and data transfer. All the settings can be easily done on 3-inch TFT touch screen. It has been elaborately designed and finely processed to match your slap-up office perfectly.



SECURITY TECHNOLOGY SOLUTION



Connection Diagram:

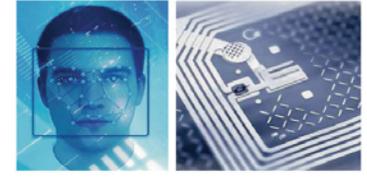

- Features:
- Elegant ergonomic design.
 - Wi-Fi, Ethernet, and USB (host and client) communication.
 - 3-inch TFT touch screen, T9 Input, 9 Digit User ID.
 - Infra-red optical system enables user-identification in poorly lit environment.
 - Optional Mifare card module.
 - Professional face identification algorithm.

Specifications:

Display	3-inch Touch Screen
Face Capacity	400(1:N)
ID Card Capacity	10,000
Logs Capacity	100,000
Communication	Wi-Fi, Ethernet , USB (host and client)
Standard Functions	ID cardAutomatic Status Switch, Self-Service Query, Work Code, T9 Input, 9 Digit User ID, DLST Scheduled-bell and Short Message.
Optional Function	Mifare Card.
Power Supply	12V/1.5A
Verification Speed	Less than 1second
Operating Temperature	0-45
Operating Humidity	20%-80%
Dimensions	104.70(L)*160.00(H)*36.00(W) mm

